



LED Red Exit & Emergency Combo

Single or Double Face in One Unit

Topaz's line of emergency exit and lighting combo units offer safety and security in an easy to install design. Emergency units are OSHA compliant and contain long lasting Ni-Cad battery backup for essential illumination during a power outage.

FEATURES

- 120/277V dual voltage operation
- Red EXIT letters and two fully adjustable LED lamp heads
- High-impact, 5VA flame retardant thermoplastic ABS housing
- Ceiling, wall, or side mounting capability (canopy included)
- Test switch and AC supply indicator
- Removeable knockout chevron directional arrows
- Battery backup with accessible test button for 90 minutes of illumination during a power outage
- Suitable for damp locations
- Meets NFPA 70, NFPA 101, UL924, NEC and OSHA standards

APPLICATIONS

- Emergency lighting for office, industrial, retail and other public spaces




**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Input Voltage: 120/277V (dual voltage)
Frequency: 50/60 Hz
CRI: N/A
Dimmability: No
Avg. Rated Life: 500 uses
Wet / Damp / Dry Location: Damp
Construction: Thermoplastic
Recharge time: 24 hrs
Runtime: >= 90 minutes
Unit Weight: 4.05 lbs
Battery Backup: Ni-Cad 3.6V 1,200mA
Ambient Operating Temperature: 50°F to 104°F
Energy Used in Maintenance Mode: 3.5W

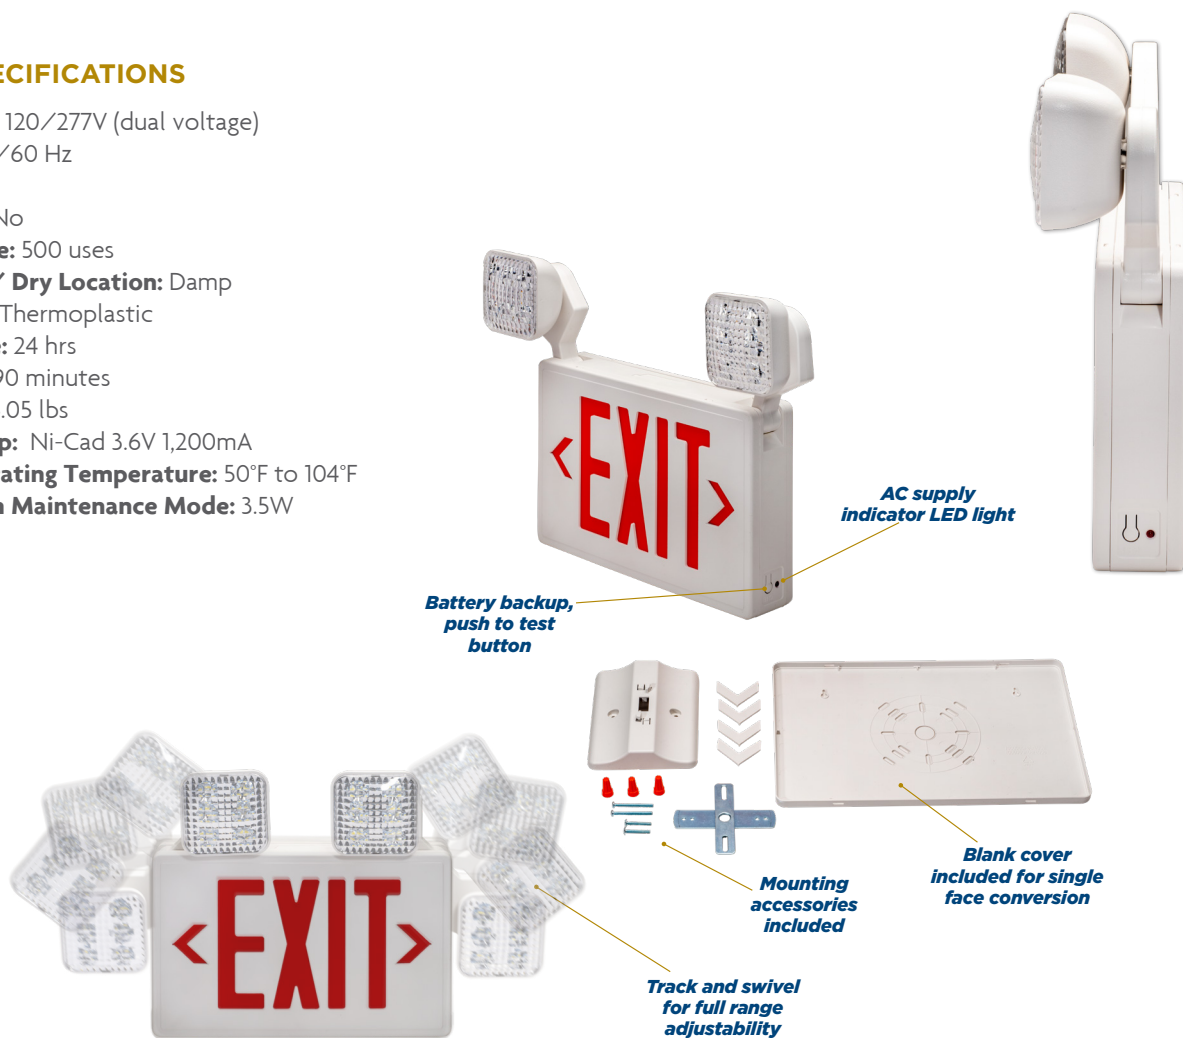

SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Mounting	Watts	Lumens	Lumens Per Watt	Dimensions	Pk-Qty
ESC/LED/RW	75139	751338033498	Wall, side or ceiling	1 watt per head	100 per head	100	13" x 2.4" x 8.3"	4-PK

NOMENCLATURE

Example: **ESC/LED/RW**

ESC=Exit Sign and Emergency Combo / **LED**=LED / **RW**=Red Letters, White Housing

