
Installation Instruction

Surface mount

Notice: Always turn off the power supply from main circuit breaker first!


1. Take out the fixture and accessories from packaging and inspect for any damages. Connect the provided short power cord to the fixture before installation.

Fig. 16

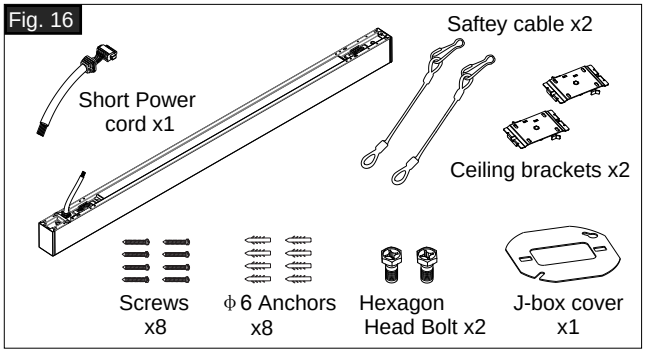


2. Position using the junction box as reference point and drill holes in the ceiling using brackets as a ruler, then install anchors.

Fig. 17

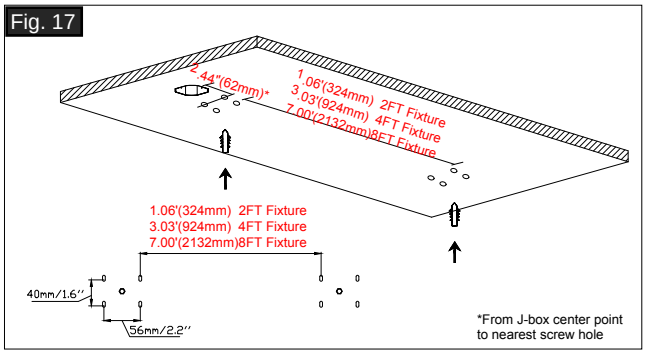


3. Fix the brackets to the ceiling with provided screws.

Fig. 18

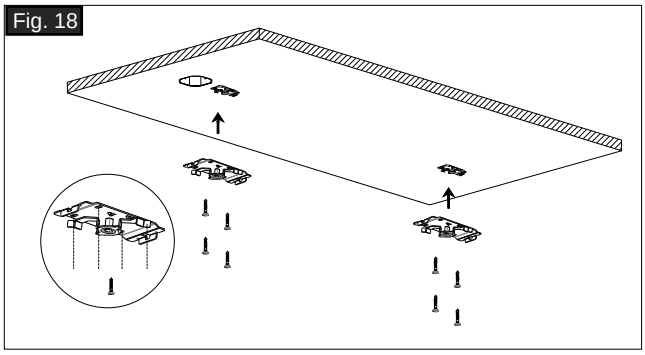


4.Fix safty cable to the fixture back with Hexagon Head Bolt. Hang the safety cables to the brakets. Pass power cord through the provided J-box cover-plate and make wiring to Main power.

Fig. 19

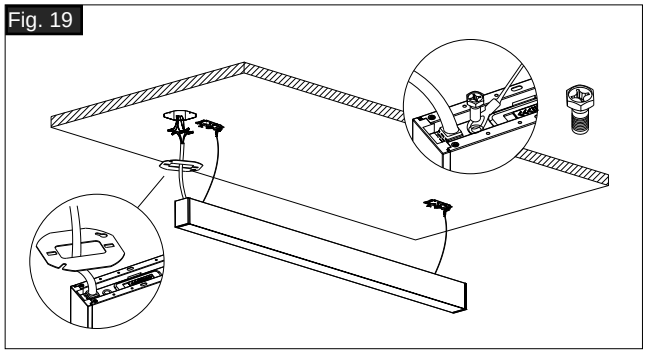


5. Attach the fixture to the brackets as shown, toggle and lock the latch on the bracket.

Fig. 20

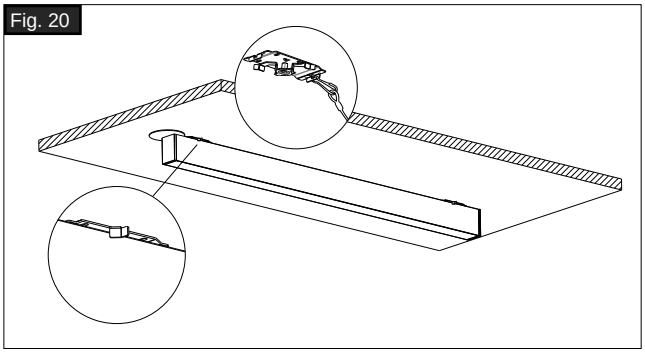

6.Make sure the fixture hung in the ceiling firmly. Clean up fingerprints and stains.

Fig. 21

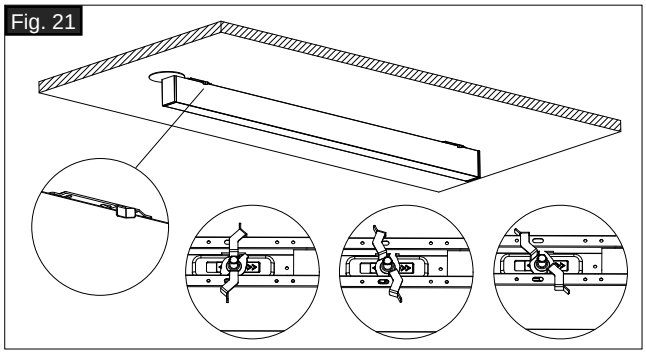


Installation Instruction

Wall mount

Notice: Always turn off the power supply from main circuit breaker first!

1. Take out the fixture and accessories from packaging and inspect for any damages. Connect the provided short power cord to the fixture before installation.


Fig. 22

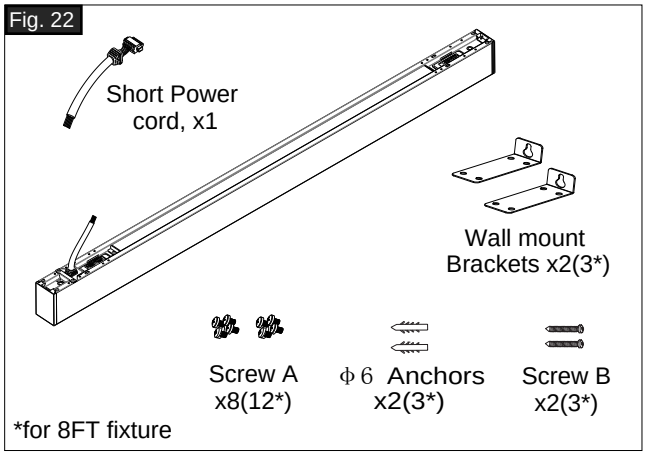

*for 8FT fixture


2. Secure the wall mount brackets to the fixture back with screw A.

Fig. 23

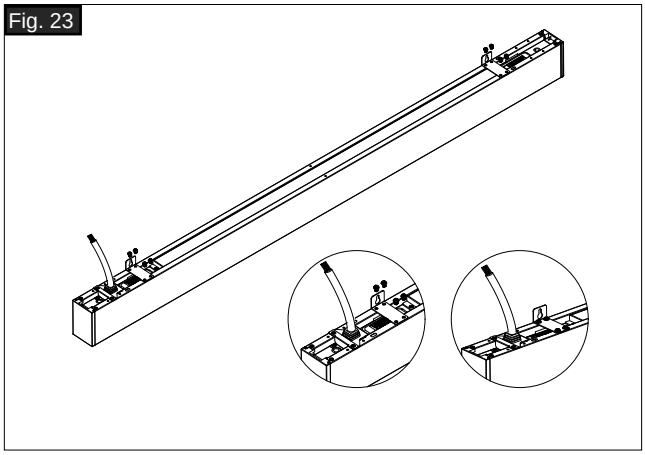

3. Position using the junction box as reference point, drill Φ6mm holes in the ceiling as shown, then install anchors and hang fixture with provided screws.

Fig. 24

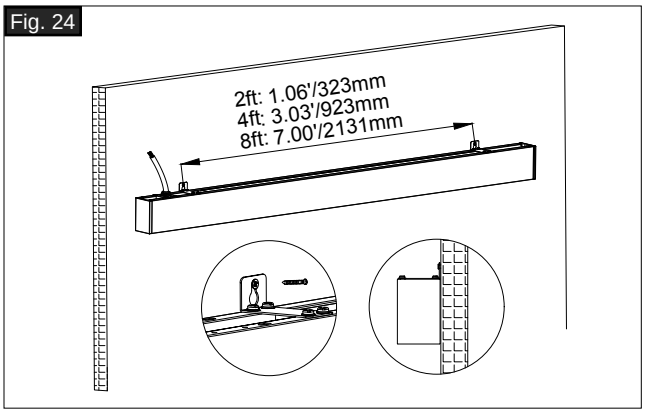

4.Do wiring connection to Main Power as required by code and local regulations. Place all wires and connectors into the junction box. Cover the junction box and clean up fingerprints and stains.

Fig. 25

