

SPECIFICATION SHEET : **TC11200350-6C**



This Is An Original Product From Fulham Co., Inc

Description: 350mA, 6W Constant Current LED Driver. 120VAC Dedicated Input Voltage. One, 350mA Independent, Constant Current Output Channel.

This Driver Will Operate Following LED Modules:
Any LED Module Designed to Accept Constant Current Input of 350mA and has a forward voltage between 3-20VDC.

ELECTRICAL DATA

INPUT VOLTAGE	120VAC \pm 10%, 50/60Hz
INPUT CURRENT (MAX)	0.13A @ 120VAC
POWER FACTOR	> 0.50
THD	<120%
EFFICIENCY	>75% @ FULL LOAD
DRIVE METHOD	CONSTANT CURRENT
OUTPUT CURRENT	350mA
OUTPUT VOLTAGE RANGE	3-20V
OUTPUT WATTAGE	6W
NUMBER OF OUTPUT CHANNELS	1
RFI/EMI	FCC CLASS 15A
SOUND RATING	A
PROTECTIONS	OUTPUT SHORT CIRCUIT PROTECTION
	OUTPUT OPEN CIRCUIT PROTECTION
	OUTPUT TO GROUND SHORT PROTECTION
	OVER LOAD PROTECTION
MAX. CASE TEMPERATURE	70°C
AMBIENT OPERATING TEMPERATURE RANGE	-20°C to 60°C
SERVICE LIFE	5,000 HOURS
APPROVALS/CLASS	UR CLASS 2, cUR, DRY AND DAMP LOCATIONS, TYPE HL

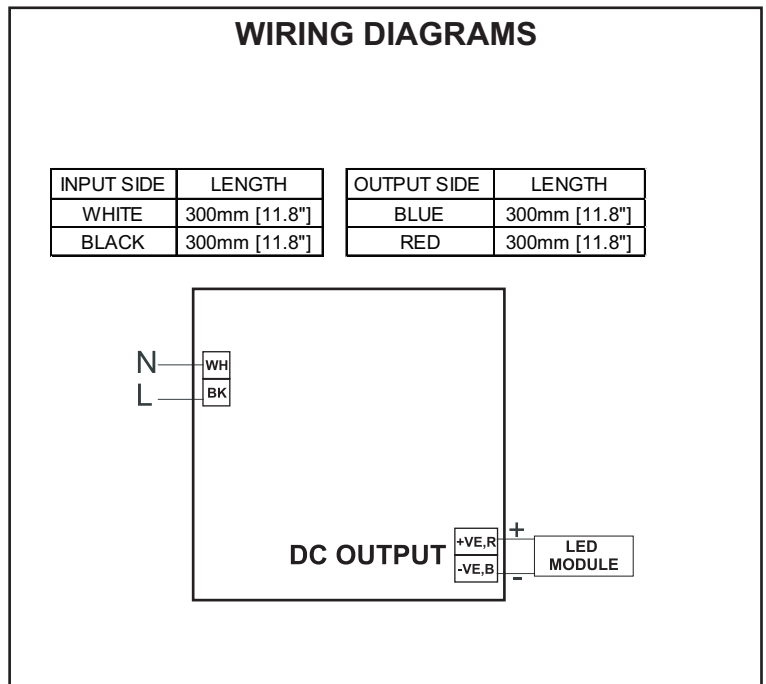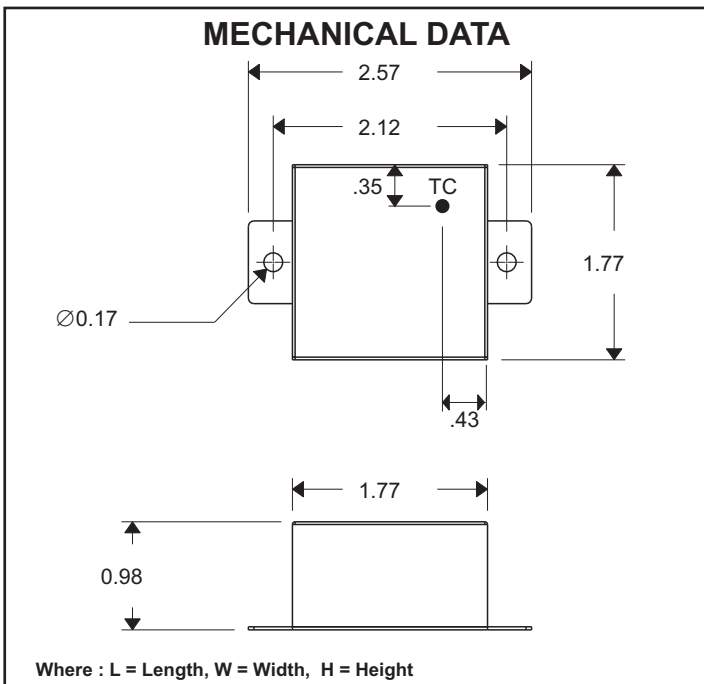

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.