SATCO | NUVO

LED T12 LAMPS

DIRECT REPLACEMENT | BALLAST COMPATIBLE







4 CCT SELECTABLE


SHATTERPROOF COATED

BALLAST COMPATIBLE T12 REPLACEMENT

SUGGESTED APPLICATIONS

Shop Light Fixtures
Laundry Rooms
Utility Closets
Garages

ColorQuick®
Selectable Color Technology



SATCO|NUVO's LED T12 ballast compatible lamps are direct replacements for T12 linear fluorescent. Offered in a frosted white finish, these lamps are also PET coated and NSF rated. The 4′ model comes with a medium bi-pin base, and the 8′ model comes with a Fa8 single-pin base. Conveniently sold in two-packs, these lamps make replacing traditional tubes an easy choice.

TYPE A | DAMP LOCATION | NSF | TRUSTED NLW WARRANTY

LED T12 LAMPS
DIRECT REPLACEMENT | BALLAST COMPATIBLE

GENERAL SPECIFICATIONS

Input Voltage: Ballast Dependent
Frequency: 50/60Hz
Type A: Ballast Compatible
Efficacy: Up to 130 LPW
CRI: 80+
CCT Selectable: 3000K/4000K/5000K/6500K


Location Rating: Damp
Ambient Operating Temperature: -20°C (-4°F) to +45°C (+113°F)
Rated for Enclosed Fixtures: No
Wiring: Double-Ended
Construction: PET Coated Glass

ITEM SPECIFICATIONS / ORDER INFO

Item	Size	Base	Lumens	Wattage	Fluorescent Replacement Wattage	Input Current @120V/277V	Beam Angle	Functional Life	Warranty	Pack QTY
S26500	4′	G13	1700/1700/1800/1800	16W	40W	0.13-0.06A	240°	50,000 Hours	5 Years	2
S26501	8′	Fa8	4400/5200/5200/4800	40W	75W	0.13-0.14A	240°	36,000 Hours	3 Years	2

DIMENSIONS / WEIGHTS

Item	MOL (A)	MOD (B)	Weight
S26500	47.74″	1.42″	0.67 Lbs
S26501	94.02″	1.42″	1.37 Lbs

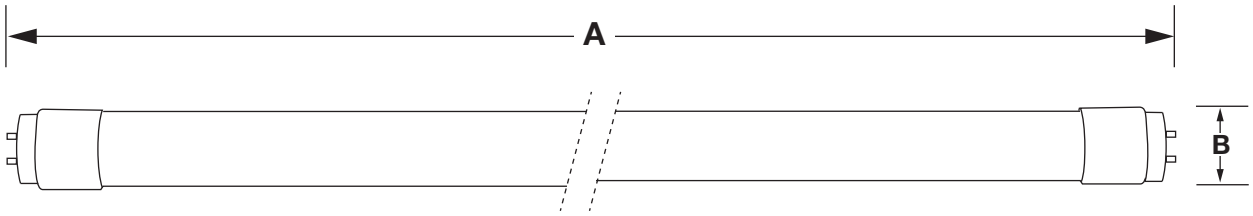

CCT Selectable Switches



S26500



S26501

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
CAN ICES-005 (A) Meets requirements of ICES-005 issue 5 class A for use in commercial applications.
WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.
Please refer to your product packaging for more information.
Replacement wattage shown depends on application and fixture.
Specifications are subject to change without prior notice.
For ballast compatibilityvisit satco.com.
Visit satco.com/service/warranty for complete warranty details.

SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. 5/25 SN1821