

Version	2.0	Date	8/11/2022
Prepared By	J.C		

		PRODUCT S
Category	LED Slim Wallpack	
Item Number	9590	
Stock Code	FXSWP45SW/8CCT3/BK/347-PHO	
Mounting	Wall mount	
Housing Color	Black	




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	45/28/15		
Tested Wattage (W)		Replacement Wattage (W)	-
Input Voltage (V)	120-347		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.41	Dimmable	0-10V
Power Factor	≥ 0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	5400/3360/1800	ССТ (К)	30/40/50K
Efficacy (lm/w)	120lm/w	Beam Angle (°)	Flood
CRI	> 80		
		<u>'</u>	

GENERAL CHARACTERISTICS		
Operating Temperature (°F)	-22 ~ 122	
Storage Temperature (°F)	-40 ~ 158	
IP Rating	IP65	
Rated Life	50000 hrs.	
Warranty	5 years	

ACCESSORIES			
Item#	Stock Code	Description	
P10005	MT-SB-SWP/BK	Mount - SWP Swivel Bracket Black	
P10006	MT-KNC-SWP/BK	Mount - SWP Knuckle Black	
P10007	MT-SF-SWP/BK	Mount - SWP Slip Fitter Black	

Width- in (mm)	6.57"	167mm
Height- in (mm)	7.87"	200mm
Depth- in (mm)	3.94"	100mm
EPA (ft²)		-
Weight (lbs)		4.4
Mounting Height (ft)		-
Cable Length (ft)		-

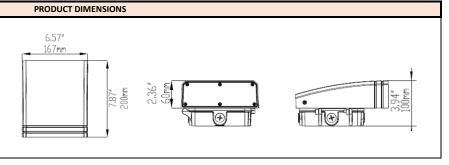

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	1
DLC	5.1 Premium	RoHs	1

DOCUMENTS			
LM79	✓	IES File	/
LM80	✓	Dimmer List	-

COMMENTS