

LED Luminaires

Flushmount Mushroom Fixtures

- Five selectable color temperatures
- Provides a diffused, low glare light output
- 120V Triac Dimmable
- Optional factory installed microwave sensor
- 5 year warranty



Specifications

Description

The Flushmount Mushroom Fixtures feature a simple, classic design that provides a timeless look to the application without sacrificing efficiency. These high performing products feature five selectable color temperatures, a low glare output and are Triac dimmable. The Flushmount Mushroom Fixtures are available in two sizes to complement any decorative residential or commercial application.

Performance

- Selectable Color Temperatures 2700K, 3000K, 3500K, 4500K, 5000K
- 80+ CRI
- L70 Lumen Maintenance > 50,000 Hours
- 120VAC, 50/60Hz Triac Dimming Driver
- Suitable for Use in Closets When Installed in Accordance with NFPA 70, NEC Section 410.16 (A)(3) and 410.16 (C)(5)
- 5 Year Limited Warranty

Construction

- Robust Steel Housing - White finish
- Diffused Polycarbonate Lens
- Driver on board
- CCT Selection Switch on LED Board
- Simple Installation

Certifications

- ETL Listed for Damp Locations

Flushmount Mushroom Fixtures

Product Description Ordering Logic EX: FM-M13-CS-WH-120V-MW

Series	Design	Product Size	CCT	Finish	Voltage	Options
FM = Flushmount	M = Mushroom	11 = 11 inch Round 13 = 13 inch Round	CS = Color Selectable 2700K/3000K/ 3500K/4000K/5000K	WH = White	120V = 120V, 50/60 Hz, Triac Dimming	MW = Microwave Motion Sensor

* For Options and Non-Stock Items - Lead Times Apply

Ordering Information

Product SKU	Product Code	Product Description
90273	FM-M11-CS-WH-120V	Flush Mount White Mushroom 11" Selectable CCT 27/30/35/40/50K 15W 1050LM 120V TRIAC Dimming Plastic Lens
90274	FM-M13-CS-WH-120V	Flush Mount White Mushroom 13" Selectable CCT 27/30/35/40/50K 21W 1450LM 120V TRIAC Dimming Plastic Lens
90278	FM-M11-CS-WH-120V-MW	Flush Mount White Mushroom 11" Selectable CCT 27/30/35/40/50K 15W 1050LM 120V TRIAC Dimming Plastic Lens with Microwave Motion Sensor
90279	FM-M13-CS-WH-120V-MW	Flush Mount White Mushroom 13" Selectable CCT 27/30/35/40/50K 21W 1450LM 120V TRIAC Dimming Plastic Lens with Microwave Motion Sensor

Performance Table

Product Code	Wattage	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (lm)	Efficacy (lm/W)								
FM-M11-CS-WH-120V	15	1255	84	1287	86	1313	88	1360	91	1334	90
FM-M13-CS-WH-120V	21	1387	71	1431	73	1452	74	1452	73	1381	70
FM-M11-CS-WH-120V-MW	15	1255	84	1287	86	1313	88	1360	91	1334	90
FM-M13-CS-WH-120V-MW	21	1387	71	1431	73	1452	74	1452	73	1381	70


Specifications Table

	FM-M11-CS-WH-120V	FM-M13-CS-WH-120V	FM-M11-CS-WH-120V-MW	FM-M13-CS-WH-120V-MW
Nominal Wattage	15W	21W	15W	21W
Delivered Lumens	1050lm	1450lm	1050lm	1450lm
Efficacy (lm/W)	70LPW	69LPW	70LPW	69LPW
CCT	Selectable - 2700K, 3000K, 3500K, 4000K, 5000K			
CRI	80+			
L70 Lifetime (hrs)	50,000			
Voltage	120VAC			
Power Factor	>0.7			
Dimming	Yes (Triac)			
Housing Material	Steel			
Lens	Plastic			
Operating Temperature	-4°F - 104°F			
Listings	ETL, FCC			
Environment	Damp Location			
Warranty	5 years Standard			


Flushmount Mushroom Fixtures

Dimensions


FM-M11-CS-WH-120V

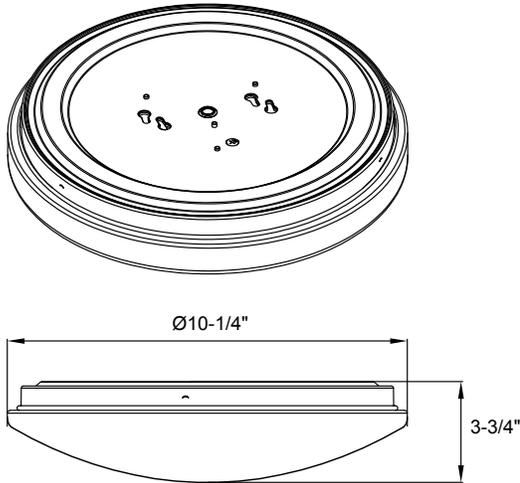


FM-M13-CS-WH-120V

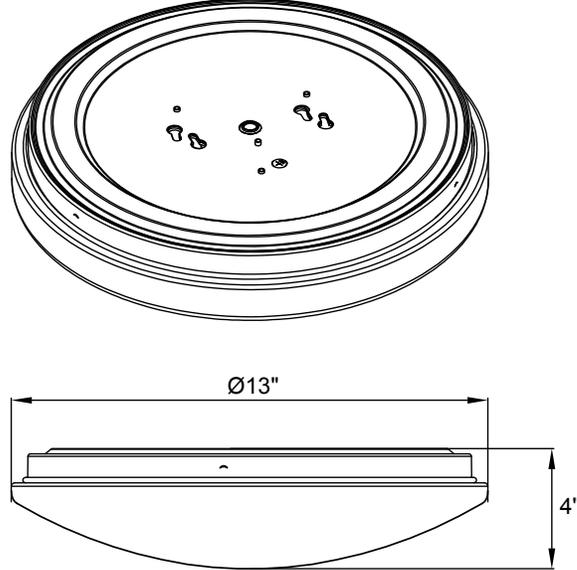

FM-M11-CS-WH-120V-MW

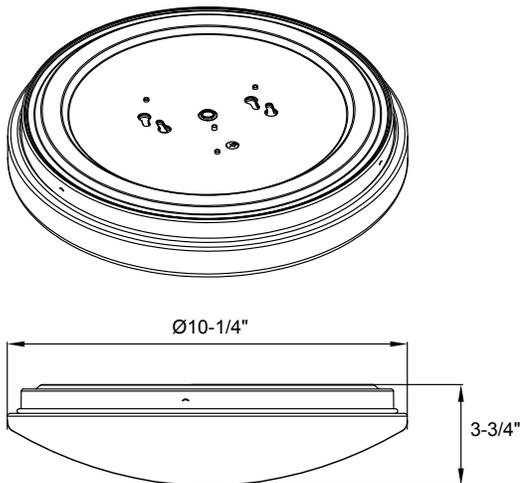


FM-M13-CS-WH-120V-MW

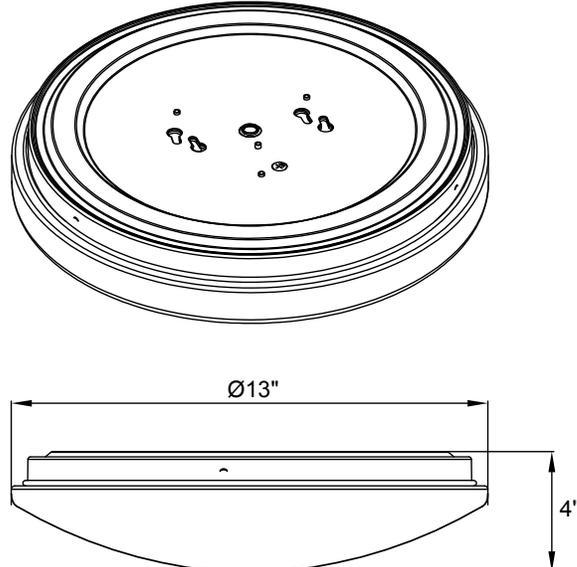


Flushmount Mushroom Fixtures

Photometric Information


90273 FM-M11-CS-WH-120V

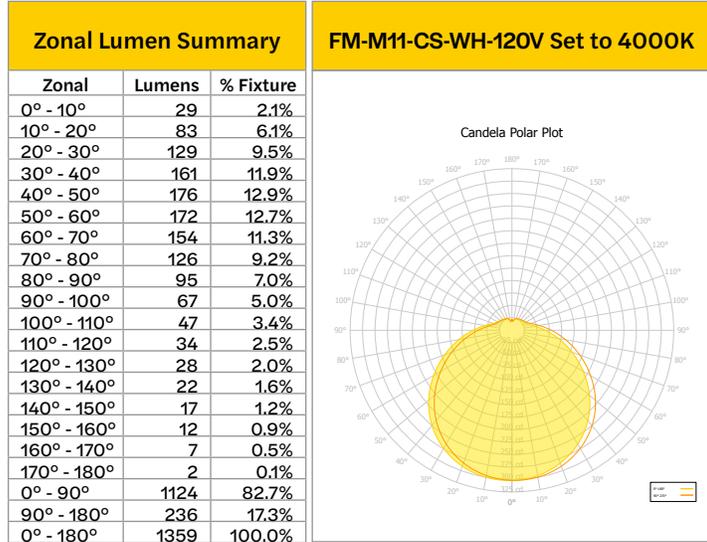

90274 FM-M13-CS-WH-120V

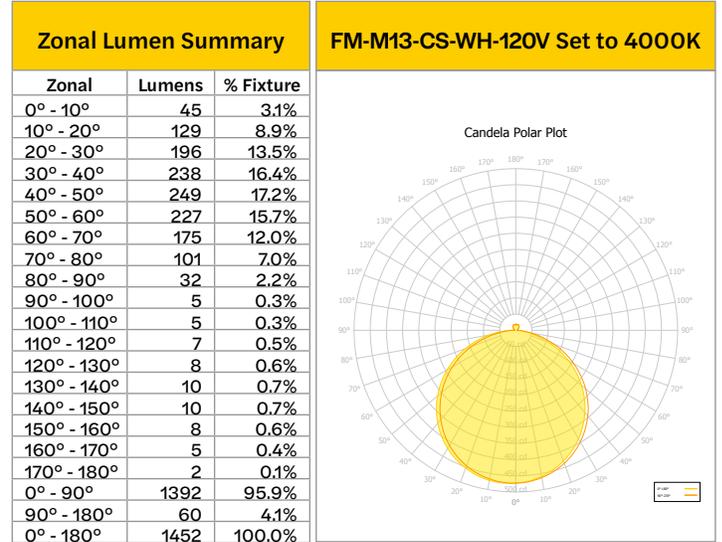

90278 FM-M11-CS-WH-120V-MW

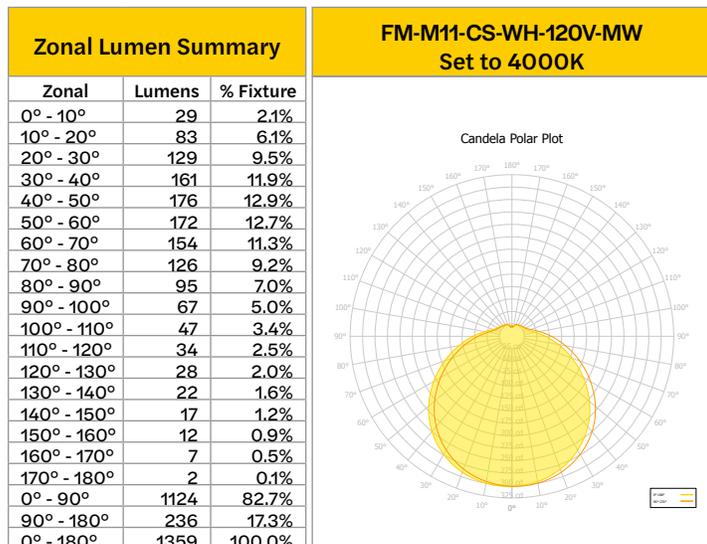

90279 FM-M13-CS-WH-120V-MW

