



150W



300W



LED Flood Lights

HIGH POWER

Durable Fixture, Flexible Mounting Options

Topaz's Flood Lights feature a one-piece, die-cast aluminum housing with a UV resistant powder coat finish. Wet location rated, this fixture is ideal for use in extreme conditions, including elevated temperatures. 150W and 300W models can be mounted at heights from 18 to 36 feet high to illuminate auto dealerships, campuses, building facades and parks. Trunnion mount included, and yoke mount accessory kit available for easy and versatile installation.

FEATURES

- IK09 impact rated, die-cast aluminum housing with excellent thermal management
- Withstands higher operating temperatures up to 122°F
- Superior optical performance with uniform light distribution
- IP66 rated for Ingress Protection
- Long functional life with significant energy savings
- Trunnion mount included with the fixture
- Includes 6-foot power cord
- Yoke mount accessory kit sold separately

SUGGESTED APPLICATIONS

- Area lighting for parking lots and perimeters
- Suitable for high mounting heights ranging from 18' to 36'
- Auto dealerships, parks, campus, façade lighting



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

LED Flood Lights

HIGH POWER

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120-277V, 50/60Hz
Power Factor/THD %: >0.9 and <20%
Dimmable: 1-10V¹
Surge Protection Rating : 6kV
Efficacy: Up to 130 LPW
CRI: 70

Beam Angle: 135°
BUG Rating: B4-U3-G2
Functional Life (L70): 50,000 hours
Location Rating: Wet
IP Rating: IP66
Ambient Operating Temp: -40°F to 122°F

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Lumens	Wattage	Input Current @ 120V/277V	CCT	NEMA Distribution	DLC ID
F-FL/150/40K/TR-87	70292	751338036352	19,500	150W	1.375A/0.596A	4000K	7H x 7V	PLP098HC58G3
F-FL/300/40K/TR-87	70293	751338036376	39,000	300W	2.75A/1.19A	4000K	7H x 7V	PLDTUZC0E7ZI
F-FL/150/50K/TR-87	70294	751338036369	19,500	150W	1.375A/0.596A	5000K	7H x 7V	PLJUOWXBMP5C
F-FL/300/50K/TR-87	70295	751338036383	39,000	300W	2.75A/1.19A	5000K	7H x 7V	PLPUHCEZPMT3

NOMENCLATURE

Example: F-FL/150/40K/TR-87

F-FL = Fixture Flood Light / **150** = 150 Watts / **40K** = 4000K CCT / **TR** = Trunnion Mount
300 = 300 Watts / **50K** = 5000K CCT

ACCESSORIES (SOLD SEPARATELY)

Catalog Number	Order Code	UPC	Description
F-FL-150WYKMOUNT-87	70296	751338036390	Yoke Mount Kit for 150W Flood Light
F-FL-300WYKMOUNT-87	70462	751338036406	Yoke Mount Kit for 300W Flood Light

ENERGY SAVINGS

Catalog Number	LED Watts	HID Replacement Watts	Watts Saved	Yearly Savings	5 Year Savings
Based on 12 hours/day and \$0.11/kWh					
F-FL/150/40K/TR-87	150W	400W	250W	\$120	\$602
F-FL/300/40K/TR-87	300W	1000W	700W	\$337	\$1,686
F-FL/150/50K/TR-87	150W	400W	250W	\$120	\$602
F-FL/300/50K/TR-87	300W	1000W	700W	\$337	\$1,686


**BUILT FOR DURABILITY.
 BUILT FOR RELIABILITY.
 BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
 Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.


PRODUCT DIMENSIONS / LINE DRAWINGS

Catalog Number	(A)	(B)	(C)	Weight
F-FL/150/40K/TR-87	19.5"	13.7"	2.7"	12.3 Lbs.
F-FL/300/40K/TR-87	26.8"	13.7"	3.1"	20.8 Lbs.
F-FL/150/50K/TR-87	19.5"	13.7"	2.7"	12.3 Lbs.
F-FL/300/50K/TR-87	26.8"	13.7"	3.1"	20.8 Lbs.
F-FL-150WYKMOUNT-87	14"	9.4"	2"	2 Lbs.
F-FL-300WYKMOUNT-87	14"	10.2"	2"	2 Lbs.

Trunnion Mount

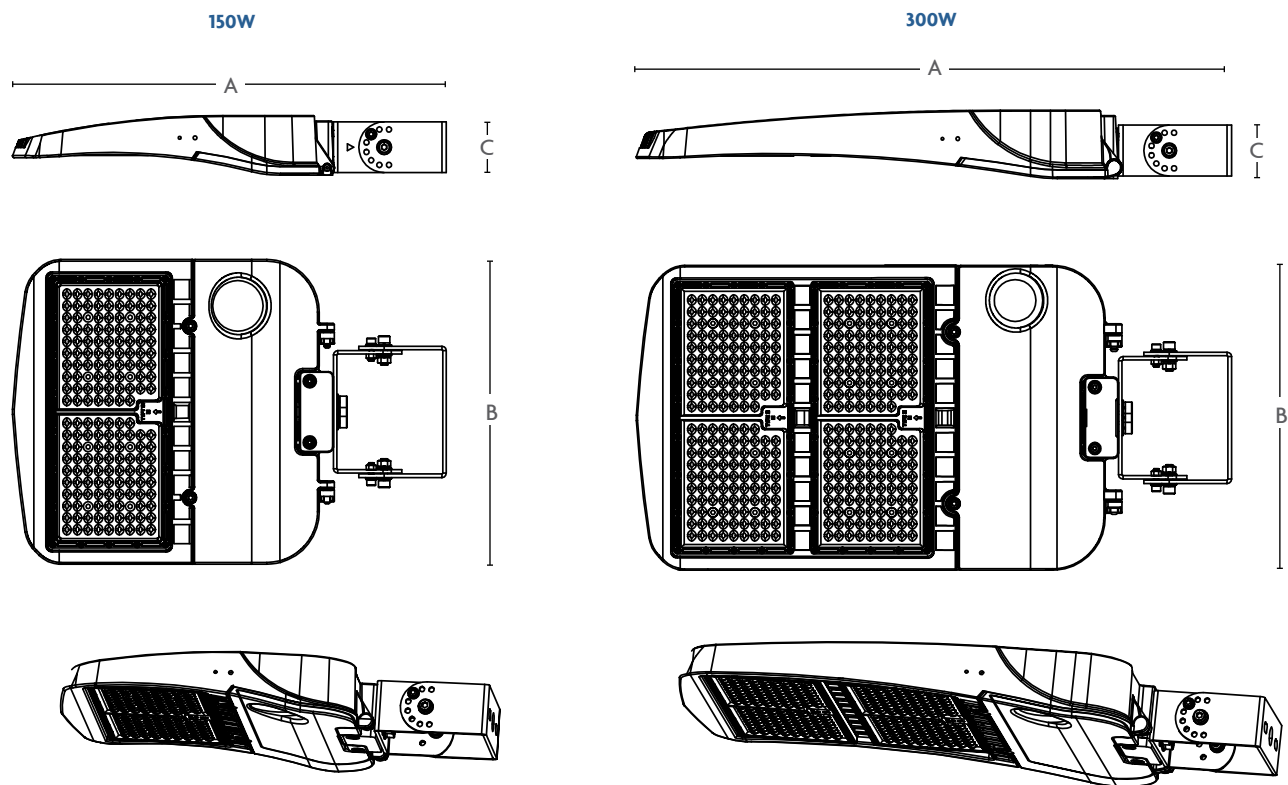

Yoke Mount (Sold Separately)

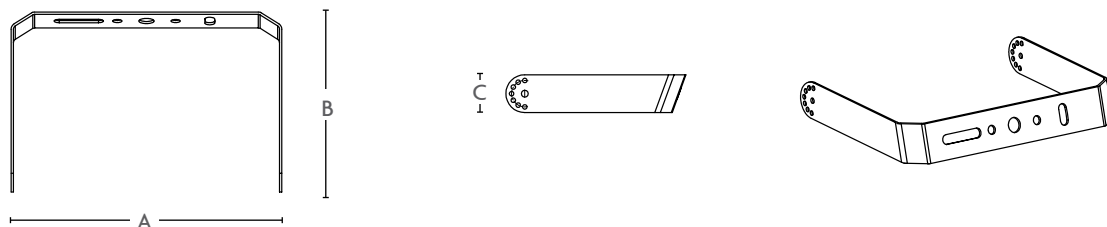

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.