



Bullhorn Mounting Brackets FOR AREA & FLOOD LIGHTS

Mounting Brackets Made Easy

Bullhorn mounting brackets are designed to safely support multiple area or flood lights. With a sturdy steel construction and powder coat finish, these brackets can endure even in harsh environments. Engineered to be compatible with standard 2 3/8" fixture tenon size, Topaz Bullhorns are available in two, three and four arm configurations.

FEATURES

- Steel construction
- Bronze finish
- Compatible with 2 3/8" fixture tenon size
- Max weight per arm: 110 Lbs.
- Mounting hardware included

APPLICATIONS

- For use with steel or concrete poles

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

GENERAL SPECIFICATIONS

Construction: A500 grade B steel

Mounting Hardware: Includes (4) M12x30mm screws

Location Rating: Wet

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	DIM A	DIM B	DIM C	Fixture Tenon Size (O.D.)	Pole Tenon Size (I.D.)	Unit Weight	Maximum Load Weight (Per Fixture)
BH2/BZ-96	70672	751338038745	21"	17"	6 7/8"	2 3/8"	2 7/8"	22.04 Lbs.	110 Lbs.
BH3/BZ-96	70675	751338038752	30 1/4"	17"	6 7/8"	2 3/8"	2 7/8"	28.66 Lbs.	110 Lbs.
BH3/120D/BZ-96	70710	751338038769	19 1/8"	11 3/4"	4"	2 3/8"	3 1/4"	15.43 Lbs.	110 Lbs.
BH4/90D/BZ-96	70735	751338038783	23 5/8"	11 3/4"	4"	2 3/8"	2 3/4"	18.73 Lbs.	110 Lbs.

NOMENCLATURE



Example: **BH2/BZ-96**

BH = Bullhorn Bracket **2** = 2 Fixture / **Blank** = Standard / **BZ** = Bronze Finish



3 = 3 Fixture / **120D** = 120 Degree

4 = 4 Fixture / **90D** = 90 Degree

BH2/BZ-96

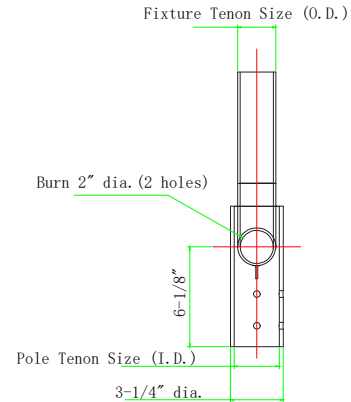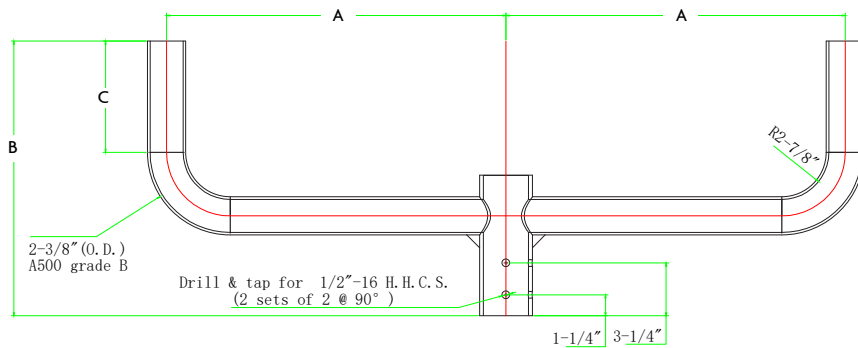

BH3/BZ-96

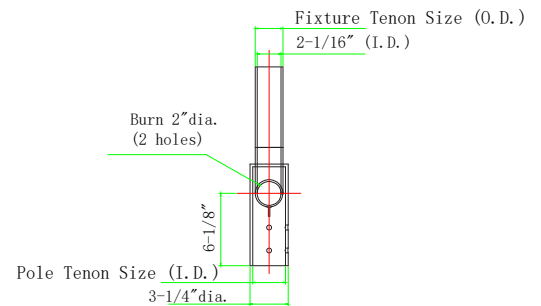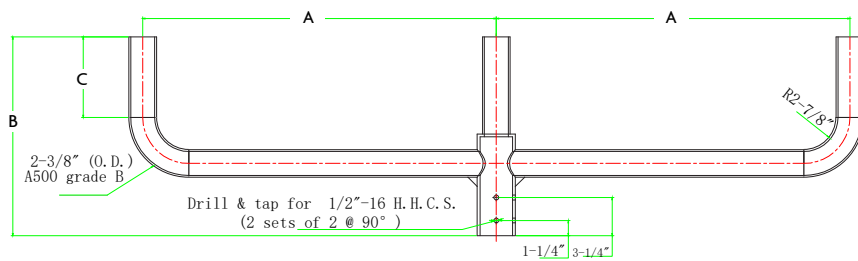

NOTES:

The mounting arms and tenon adapters are designed for applications in areas of normal winds. Consult a qualified engineer prior to the design of systems on structures or areas known to have abnormal winds such as airports, bridges, or coastal areas. Failure to consider these factor in the system design could result in the failure of the pole or mast arm, and consequently personal injury or property damage.

Specifications subject to change without prior notice.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.




March 2021




Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.

BH3/120D/BZ-96

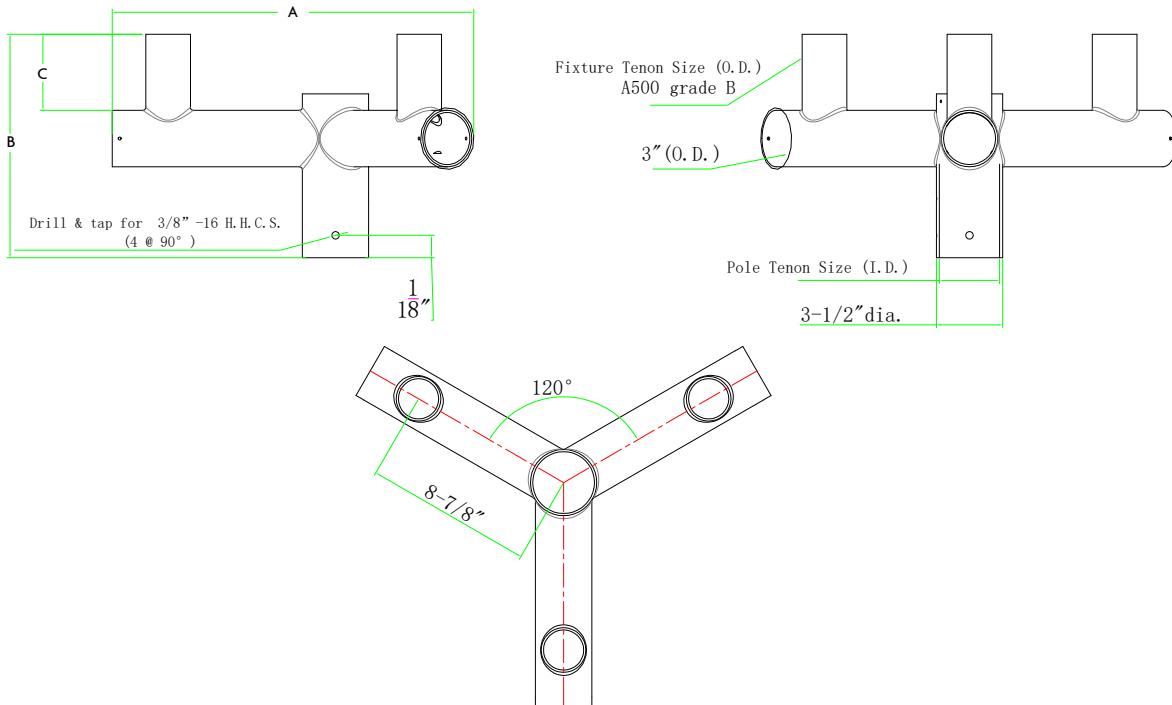

BH4/90D/BZ-96

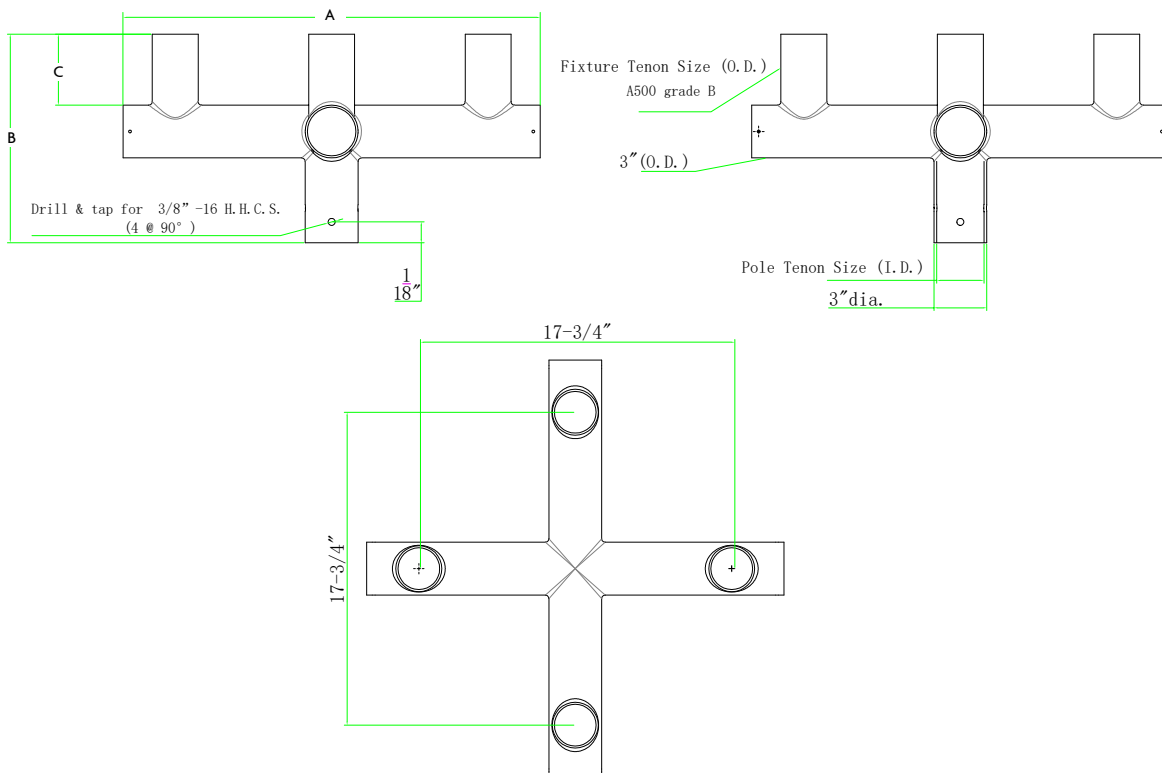

March 2021

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.