



LED SPORTS LIGHT

POWER SELECTABLE

SUGGESTED APPLICATIONS

- High output pole mount applications
- Sport fields
- Municipal fields
- Arenas
- Parking lots
- Golf ranges

FEATURES

- Power Selectable: three performance levels
- Black heavy-duty die-cast aluminum housing with IK08 impact rated lens
- Shorting cap and 7-pin receptacle included (Photocell accessories available)
- Optimum light spread with 20° and 30° beam angles available
- Detachable driver allows fixture control from pole base
- Yoke Mount (pre-installed) with Slip Fitter Mount accessory available
- Glare Shield accessories available to prevent light pollution
- 35-ft and 65-ft Extension Cord accessories available
- Fixture mountable laser accessory available for fixture aiming



INPUT VOLTAGE:
120-277V AND 200-480V
OPTIONS AVAILABLE

5000K CCT, >70 CRI

DIMMING: 0-10V, DOWN TO 1%

EFFICACY: UP TO 160 LPW


WEATHERPROOF: IP65 AND
20KV SURGE PROTECTION

LIFETIME (L70): UP TO
60,000 HOURS

MOUNTING HEIGHT: UP TO
115 FEET

BUG RATING:
B5-U0-G2 (500W)
B5-U0-G5 (750W & 1200W)

POWER CORD: SJOW/10FT



BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED SPORTS LIGHT

POWER SELECTABLE

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	INPUT VOLTAGE MAX. INPUT CURRENT	POWER SELECTABLE WATTAGE	LUMEN	CCT	EFFICACY (LPW)	TYPICAL MOUNTING HEIGHT	HID REPLACEMENT WATTAGE
SP-500PS-50K	74446	032886312144	120-277V 4.2/1.9A	300W	48,000	5000K	160	32-85 FT	1,200W
				400W	62,000		155		1,600W
				500W	75,000		150		2,000W
SP-500PS-50K-HV	74447	032886312151	200-480V 2.5/1.1	300W	48,000	5000K	160	32-85 FT	1,200W
				400W	62,000		155		1,600W
				500W	75,000		150		2,000W
SP-750PS-50K	74448	032886312168	120-277V 6.3/2.9A	450W	72,000	5000K	160	49-98 FT	1,800W
				500W	77,500		155		2,000W
				750W	112,500		150		3,000W
SP-750PS-50K-HV	74449	032886312175	200-480V 3.8/1.7A	450W	72,000	5000K	160	49-98 FT	1,800W
				500W	77,500		155		2,000W
				750W	112,500		150		3,000W
SP-1200PS-50K	74450	032886312182	120-277V 10.1/4.6A	800W	128,000	5000K	160	66-115 FT	3,200W
				1,000W	155,000		155		4,000W
				1,200W	180,000		150		4,800W
SP-1200PS-50K-HV	74451	032886312199	200-480V 6.1/2.7A	800W	128,000	5000K	160	66-115 FT	3,200W
				1,000W	155,000		155		4,000W
				1,200W	180,000		150		4,800W

NOTE: 500W and 750W fixtures have a 30° Beam Angle. 1200W fixtures have a 20° Beam Angle.

ORDERING GUIDE

Example: **SP-750PS-50K**

PRODUCT	POWER SELECTABLE LUMEN OPTIONS		CCT	INPUT VOLTAGE
SP = SPORTS LIGHT	500PS =	(300W) 48,000LM	50K = 5000K	BLANK = 120-277V HV = 200-480V
		(400W) 62,000LM		
		(500W) 75,000LM		
		(450W) 72,000LM		
	750PS =	(500W) 77,500LM		
		(750W) 112500LM		
		(800W) 128,000LM		
		1200PS =		
	(1200W) 180,000LM			






LED SPORTS LIGHT

POWER SELECTABLE

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS.)	PALLET QUANTITY (PCS)* 48"x 40"x 60"
SP-500PS-50K	17.3	17.6	16.5	32.8	12PCS
SP-500PS-50K-HV	17.3	17.6	16.5	32.8	12PCS
SP-750PS-50K	21.8	21.3	19.5	48.1	6PCS
SP-750PS-50K-HV	21.8	21.3	19.5	48.1	6PCS
SP-1200PS-50K	24.6	22.5	21.3	47.6	3PCS
SP-1200PS-50K-HV	24.6	22.5	21.3	47.6	3PCS

*pallet qty's may vary

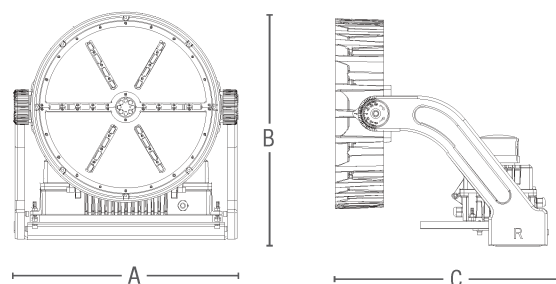

SP-SFMOUNT-500
SP-SFMOUNT-750
SP-SFMOUNT-1200



SP-SHIELD-500
SP-SHIELD-750
SP-SHIELD-1200



SP-EXTCORD-35FT
SP-EXTCORD-65FT



SP-LASERPOINTER



120-277V TWIST-LOCK
PHOTOCELL



480V TWIST-LOCK
PHOTOCELL

ACCESSORIES (SOLD SEPARATELY)


MODEL #	ORDER CODE	UPC	DESCRIPTION
SP-SFMOUNT-500	74452	032886313103	SLIPFITTER MOUNT FOR 500W SPORT LIGHT
SP-SFMOUNT-750	74453	032886312601	SLIPFITTER MOUNT FOR 750W SPORT LIGHT
SP-SFMOUNT-1200	74454	032886312618	SLIPFITTER MOUNT FOR 1200W SPORT LIGHT
SP-SHIELD-500	74455	032886312625	SHIELD GUARD FOR 500W SPORT LIGHT
SP-SHIELD-750	74482	032886312632	SHIELD GUARD FOR 750W SPORT LIGHT
SP-SHIELD-1200	74484	032886312649	SHIELD GUARD FOR 1200W SPORT LIGHT
SP-EXTCORD-35FT	74486	032886312656	35-FT EXTENSION CORD
SP-EXTCORD-65FT	74490	032886312663	65-FT EXTENSION CORD
SP-LASERPOINTER	74500	032886312670	GREEN LASER POINTER
WD-PC/TL/120-277	72711	751338033771	120-277V TWIST-LOCK PHOTOCELL
WD-PC/TL/480	72722	751338033788	480V TWIST-LOCK PHOTOCELL





LED SPORTS LIGHT

POWER SELECTABLE

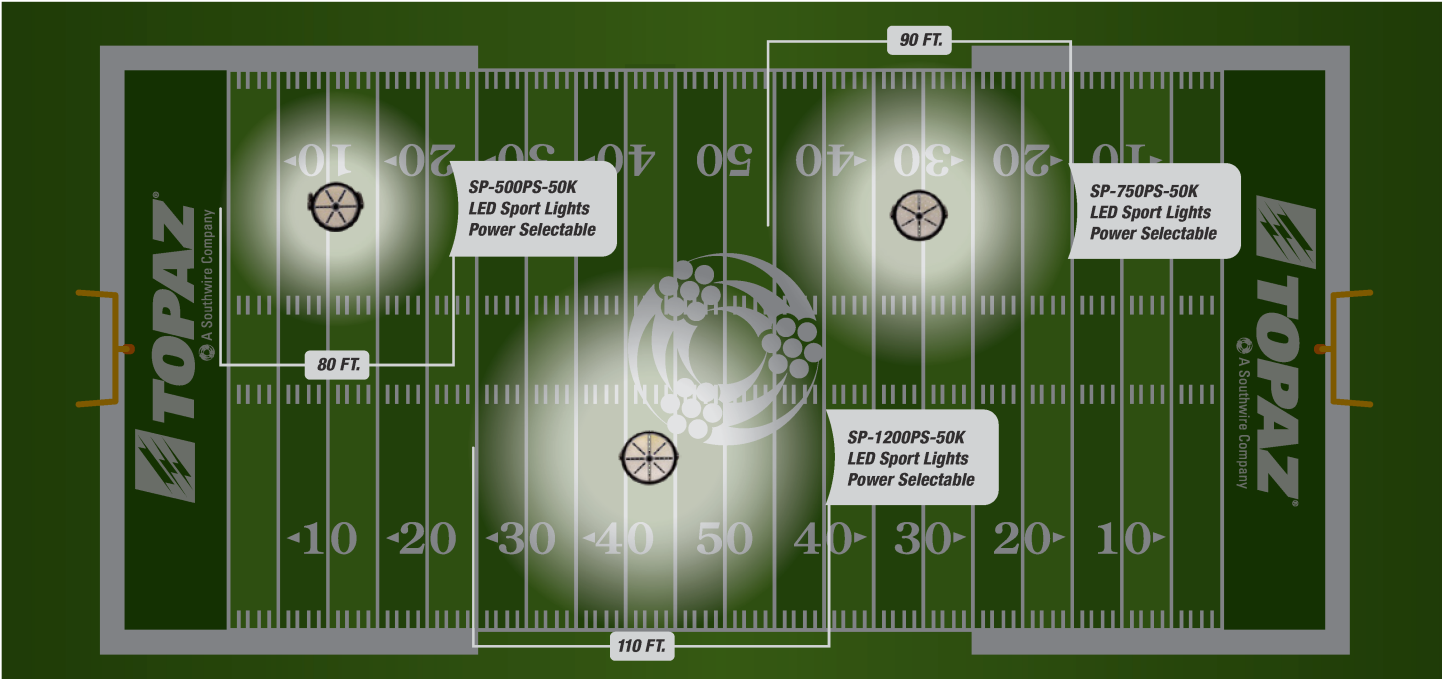

ENERGY SAVINGS

Based on 12 hours/day and \$0.11/kWh

MODEL #	LED WATTAGE	REPLACEMENT WATTAGE	WATTS SAVED	YEARLY SAVINGS	5 YEAR SAVINGS
SP-500PS-50K SP-500PS-50K-HV	500W	2000W	3,285,000	\$985.50	\$4,927.50
SP-750PS-50K SP-750PS-50K-HV	750W	3000W	4,927,500	\$1,478.25	\$7,391.25
SP-1200PS-50K SP-1200PS-50K-HV	1200W	4800W	7,884,000	\$2,365.20	\$11,826.00

* based on 6 hours daily usage at max wattage output

DLC INFORMATION

MODEL #	DLC I.D.	DLC CLASSIFICATION	DLC PRIMARY USE
SP-500PS-50K	S-QB7P0D	PREMIUM	ARCHITECTURAL FLOOD AND SPOT LUMINAIRES
SP-500PS-50K-HV	S-XH19UK		
SP-750PS-50K	S-4FPH9D		

MODEL #	DLC I.D.	DLC CLASSIFICATION	DLC PRIMARY USE
SP-750PS-50K-HV	S-8PI0MN	PREMIUM	ARCHITECTURAL FLOOD AND SPOT LUMINAIRES
SP-1200PS-50K	S-RPY4LC		
SP-1200PS-50K-HV	S-W4P01Z		

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**