



LED LOW PROFILE PARKING GARAGE/CANOPY LIGHT

POWER & CCT SELECTABLE WITH UPLIGHT

SUGGESTED APPLICATIONS

- Parking garages
- Exterior canopies
- Stairwells
- Carports

FEATURES

- 12 fixtures in 1 with Power & CCT Selectable technology
- Low profile white die-cast aluminum housing with UV resistant polycarbonate lens
- Uplight reduces dark ceiling areas enhancing light distribution
- Sensor-ready to accept occupancy sensor with audio jack
- Hinged mounting bracket makes installation easy
- Emergency battery backup model available



INPUT VOLTAGE: 120-277V

FREQUENCY: 50/60HZ

POWER FACTOR, THD %:
>0.9; <20%

DIMMABLE: 0-10V,
DOWN TO 10%

SURGE PROTECTION
RATING: 6KV

CRI: 80

BEAM ANGLE: 150°

LIFETIME (L70):
54,000 HOURS

AMBIENT OPERATING
TEMPERATURE:
STANDARD MODEL:
-40°F - 113°F
EM MODEL: 32°F - 113°F

IK (IMPACT RATING): IK08

MOUNTING OPTIONS: WALL
MOUNT, CEILING MOUNT,
PENDANT MOUNT

MOUNTING HEIGHT: 10FT

7FT POWER LEADS




BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED LOW PROFILE PARKING GARAGE/CANOPY LIGHT

POWER & CCT SELECTABLE WITH UPLIGHT

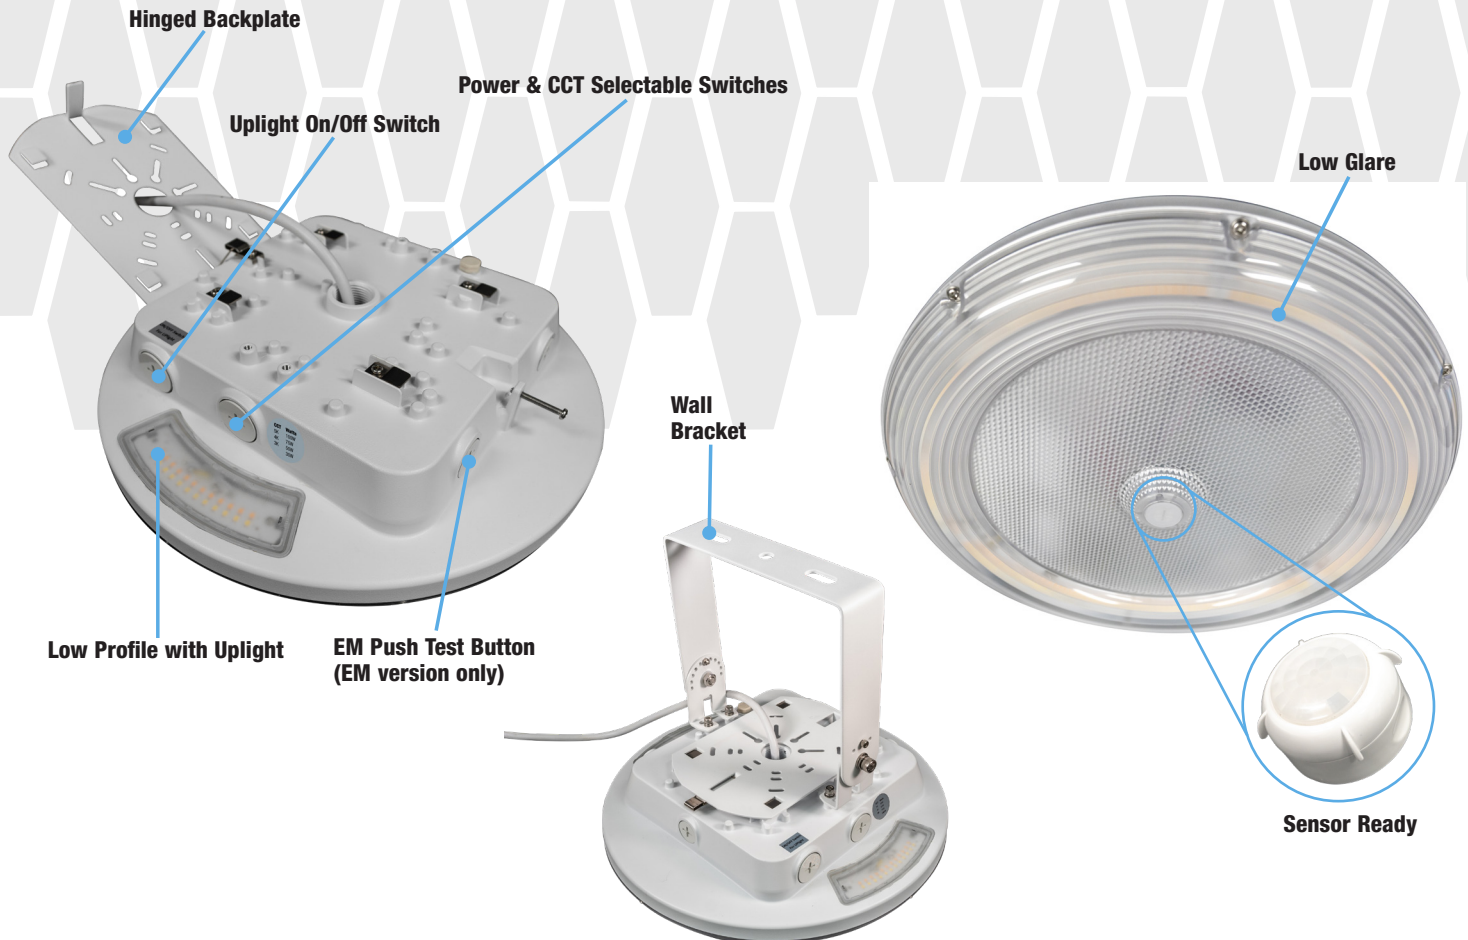

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.



LED LOW PROFILE PARKING GARAGE/CANOPY LIGHT

POWER & CCT SELECTABLE WITH UPLIGHT

ITEM SPECIFICATIONS | ORDER INFO

MODEL #	ORDER CODE	UPC	INPUT VOLTAGE MAX. INPUT CURRENT	POWER SELECTABLE WATTAGE	LUMENS @ 3000K	LUMENS @ 4000K	LUMENS @ 5000K	LPW @ 5000K
GCP-100PCS-WH	76795	032886191565	120-277V 0.92A/0.40A	30W	3,960	4,280	4,190	140
				50W	6,380	6,870	6,960	139
				75W	9,260	10,110	10,125	135
				100W	12,000	13,120	13,310	133
GCP-100PCS-WH-EM	76796	032886193477	120-277V 0.92A/0.40A	30W	3,960	4,280	4,190	140
				50W	6,380	6,870	6,960	139
				75W	9,260	10,110	10,125	135
				100W	12,000	13,120	13,310	133

DEFAULT SETTING: 100W/5000K/UPLIGHT "ON"

DIRECT(DOWNLIGHT)	INDIRECT(UPLIGHT)
100%	0
90%	10%

ORDERING GUIDE

Example: **GCP-100PCS-WH-EM**

PRODUCT	POWER SELECTABLE	CCT SELECTABLE	OPTIONS
GCP = GARAGE CANOPY PARKING	P= 30W/50W/75W/100W	CS=3000K/4000K/5000K	WH = WHITE FINISH EM = EMERGENCY BATTERY BACKUP

DLC INFORMATION

MODEL #	DLC I.D.	DLC CLASSIFICATION	DLC PRIMARY USE
GCP-100PCS-WH	PREMIUM	PARKING GARAGE LUMINAIRES	S-YJY4GP
GCP-100PCS-WH-EM			





LED LOW PROFILE PARKING GARAGE/CANOPY LIGHT

POWER & CCT SELECTABLE WITH UPLIGHT

ACCESSORIES (SOLD SEPARATELY)

MODEL #	ORDER CODE	UPC	DESCRIPTION
GCP-WB	76797	032886191589	MOUNTING BRACKET
OS-PIR-BT-12V	75850	32886309670	PROGRAMMABLE PIR BLUETOOTH OCCUPANCY SENSOR WITH AUDIO JACK
OS-PIR-12V	75852	32886309663	PIR OCCUPANCY SENSOR WITH AUDIO JACK (REMOTE CONTROL REQUIRED FOR PROGRAMMING)
F-LUHB/RC/G3	72725	751338038509	REMOTE CONTROL FOR OS-PIR-12V PIR OCCUPANCY SENSOR



GCP-WB



OS-PIR-BT-12V



OS-PIR-12V






F-LUHB/RC/G3

DIMENSIONS | WEIGHT

MODEL #	A (IN)	B (IN)	C (IN)	WEIGHT (LBS)	PALLET QUANTITY (PCS)* 48"X 40"X 60"
GCP-100PCS-WH				5.7	54
GCP-100PCS-WH-EM	13.58	13.58	3.7	7	
GCP-WB	8.27	1.97	7.31	1.8 LBS	1400

*PALLET QTYS MAY VARY



**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612
Fax 800.880.0822 | halcolighting.com | Atlanta | Cleveland | Houston | Phoenix | New Jersey © 2026 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change without notice.