



4" Low Voltage New Construction Cans and Trims

FEATURES

- Use with 12V MR16 or LED Equiv & Trim
- Plaster frame: Galvanized steel construction. Housing can be removed from plaster frame to provide access to the junction box
- Housing: Double wall aluminum construction for greater heat dissipation. Gasketed to prevent airflow from heated or air conditioned space. Housing adjusts for ceiling up to 1-1/4" thick
- Transformer: 120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W
- Thermal protector: Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation
- UL Listed for damp location
- UL Listed for feed through wiring
- Certified under ASTM-E283 for airtight construction

INSTALLATION

- Bar hanger: Pre-installed nails easily install in regular, or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degrees on plaster frame
- Junction box: Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief




IC Airtight

Item #: RH4/NLV/IC/AT

Order Code: T79138

DIMENSIONS

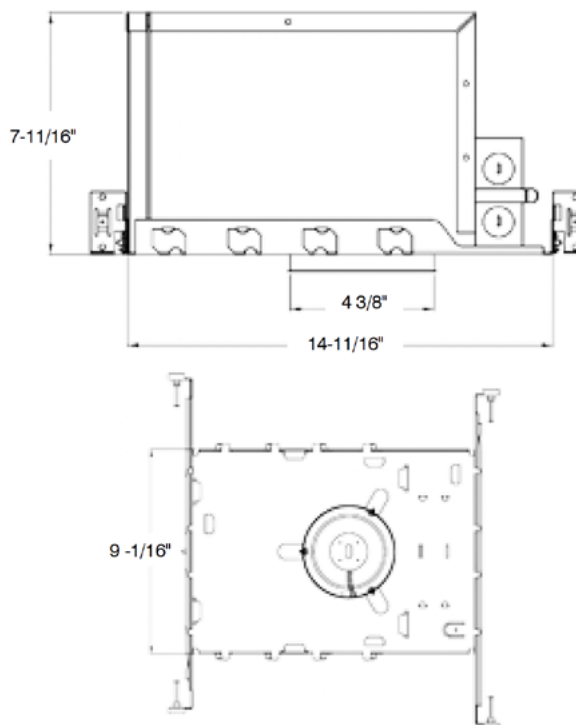




4" LOW VOLTAGE TRIM OPTIONS




RT400WH/LV

White Reflector with White Ring
Uses MR16 Lamps
Order Code: T79128

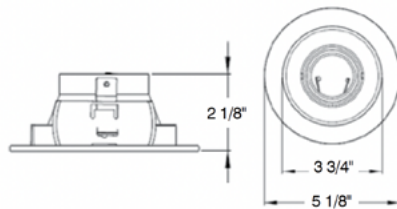


RT401WH/LV

All Steel White Baffle with White Ring
Uses MR16 Lamps
Order Code: T79127

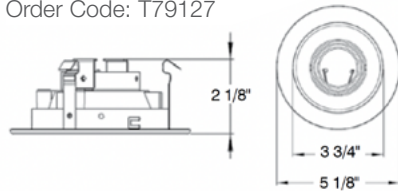

RT406WH/LV

Shallow White Baffle with White Gimbal
Uses MR16 Lamps
Order Code: T77669

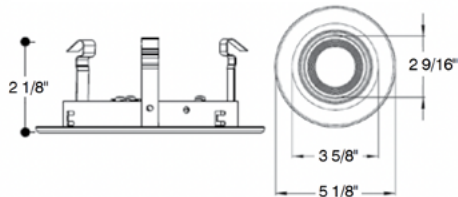

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**