



KTEB-126-1-TP-SC-RJS

COMPACT FLUORESCENT ELECTRONIC BALLAST



DESCRIPTION

1 x 26W CFL | 120V Input | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid Start
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120Vac ±10%
INPUT FREQUENCY: 50/60 Hz
POWER FACTOR: Normal
WARRANTY: 3 Years

PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Meets ANSI/IEEE C62.41 Category A
- UL, cUL 935 Listed
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%
CFQ26W/G24q	1	120	24	0.40	>0.50	<1.70	0.90	3.75	150
CFS28W/GR10q	1	120	26	0.40	>0.50	<1.70	0.90	3.46	130
F32T8	1	120	32	0.48	>0.50	<1.70	0.95	2.97	130
F25T8	1	120	25	0.38	>0.50	<1.70	0.95	3.80	130
F19T8 (28" or 30")	1	120	18	0.29	>0.50	<1.70	1.00	5.56	150
F18T8 (24" or 26")	1	120	17	0.27	>0.50	<1.70	1.00	5.88	160
F17T8	1	120	18	0.27	>0.50	<1.70	1.00	5.55	150
F15T8	1	120	16	0.25	>0.50	<1.70	1.00	6.25	150
F13T8	1	120	16	0.23	>0.50	<1.70	1.10	6.88	160
FC9T5	1	120	23	0.34	>0.50	<1.70	1.05	4.57	140

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	4.00"
WIDTH	1.87"
HEIGHT	1.19"
M1	3.58"
M2	2.00"
M3	0.63"
CASE STYLE	L34

STANDARD LEAD LENGTHS*

WHITE	6.50"
BLACK	6.50"
BLUE	6.50"
RED	6.50"

*Consult Keystone for special lead length requirements.

Lead wires are 18 AWG
105 C°/600V, solid copper.


CASE MATERIAL: Metal




KTEB-126-1-TP-SC-RJS

COMPACT FLUORESCENT ELECTRONIC BALLAST

WIRING DIAGRAM

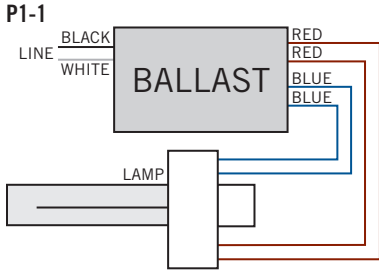

HOT SPOT LOCATION

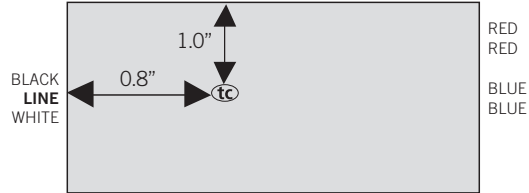

Actual tc point is noted on each ballast label.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-126-1-TP-SC-RJS /HB-CP	Carton Pack	40	Active

CATALOG NUMBER BREAKDOWN

KTEB-126-1-TP-SC-RJS /HB-CP

KTEB	126	1	TP	SC	RJS	/HB	CP	
Keystone Technologies Electronic Ballast	1 Lamp	Wattage	120V Input	Thermal Protection	Slim Case	Rear Junction Leads with Studs	Manufacturing Revision	Packaging Style