ROUND SLIMFIT DOWNLIGHTS

PERFORMER SERIES | CCT SELECTABLE REMOTE DRIVER







CONVENIENT 12-PACK
4 OR 6 INCH ROUND

NON-CONDUCTIVE
DEAD FRONT TRIM

REMOTE DRIVER J-BOX

5 CCT SELECTABLE

SLIMFIT FOR TIGHT SPACES

90+ CRI HIGH QUALITY LIGHT

SUGGESTED APPLICATIONS
Residential
Multi-Family
Showers
Bathrooms
KItchens
Closets
Laundry Rooms

12 PACK

SATCO's Performer Series 12-Pack SlimFit Downlights deliver the flexibility and performance installers trust in a convenient solution designed for larger projects. Perfect for builders, contractors, and multi-room installations.

Priced per piece, the 12-pack configuration simplifies purchasing, reduces ordering time, and helps keep every fixture consistent. Available in 4-inch and 6-inch sizes, each fixture features five selectable color temperatures (2700, 3000, 3500, 4000, and 5000K) allowing the ideal light color to be selected during installation. Complete with a remote driver junction box, adjustable spring clips for quick installation, and a low-profile design, these wet location rated downlights provide a reliable solution for new construction, remodels, and residential applications.

CCT SELECTABLE · 90+ CRI · 120 VOLT · DIMMABLE · WET LOCATION · Non-Conductive Shower-Safe · CLOSET RATED · IC RATED · AIR TIGHT · TITLE 24 · ENERGY STAR · 50,000 HOURS · 5 YEAR WARRANTY · TRUSTED NB WARRANTY · TAA COMPLIANT

ROUND SLIMFIT DOWNLIGHTS
PERFORMER SERIES | CCT SELECTABLE | REMOTE DRIVER

GENERAL SPECIFICATIONS

Input Voltage: 120V
Frequency: 60Hz
Power Factor: >0.9
THD: <20%
Dimmable: Phase-Cut Dimmable Down to 10%
CRI: 90+
CCT Selectable: 2700/3000/3500/4000/5000K
Beam Angle: 110°
Location Rating: Wet

Ambient Operating Temperature: -4°F to +104°F (-20C° to +40°C)
Suitable for Bathroom Applications: Yes
IC Rated: Yes
Air Tight Rated: Yes
Finish: White
Construction & Lens Material: Plastic
Functional Life: 50,000 Hours
Warranty: 5 Year

ITEM SPECIFICATIONS / ORDER INFO

Item	Order Code	Size	Lumens	Wattage	Incandescent Replacement Wattage	Input Current @120V	Efficacy
S11682	DLS9WL4R/9CCT5/WHF/D120/12PK	4"	750L	9W	40W	0.10A	Up to 83 LPW
S11683	DLS13WL6R/9CCT5/WHF/D120/12PK	6"	1100L	13W	75W	0.13A	Up to 84 LPW

NOMENCLATURE

DLSXWL4R/9CCT5/WHF/D120/12PK*
1 2 3 4 5 6 7 8 9 10 11

1- Downlight Slimfit
2-Wattage
3-LED
4-Size and Shape
5-CRI (90+)
6-5 CCT Selectable
7-Finish
8- Lens Type
9-Dimmability
10-Voltage
11-12 Pack*

*Must order in multiples of 12.

DIMENSIONS / WEIGHTS

Item	Diameter (A)	Height (B)	Weight
S11682	4.74"	1.75"	0.66 Lbs.
S11683	6.79"	1.75"	0.88 Lbs.

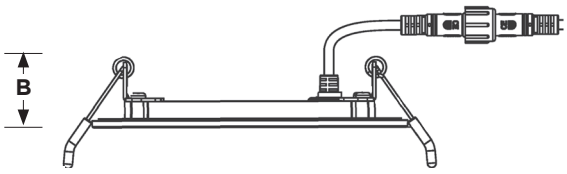

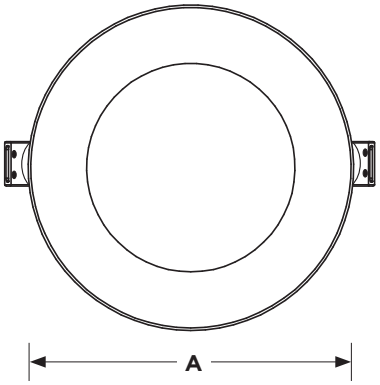

REMOTE DRIVER AND CABLE DIMENSIONS

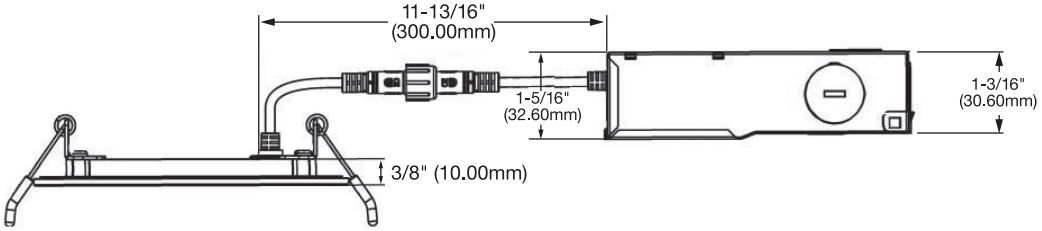

© Satco Products, Inc. All rights reserved. 7/26 SN2095