



PROJECT:
CONTACT:
LOCATION:
TYPE:



V8622-5
Black



V8622-6
White



V8622-33
Brushed Nickel





V8622-79
Antique Bronze

PRODUCT DESCRIPTION

This integrated LED indoor or outdoor convertible flush mount or wall mount, features a sealed frosted polycarbonate lens cover and round flanged trim. Easily installs into 4" or 3" ceiling or wall junction boxes. Housing and trim features all-aluminum construction. Feel at ease with cast aluminum's corrosion-resistance, high resilience, lasting quality, and inability to rust like steel. Go green and save big. Energy-efficient LED is environmentally friendly and requires substantially less electricity to maintain, passing down cost-cutting savings to you. Features cold temperature startup in weather as low as 20°C. Operates up to 80°C. Perfect complement to indoor or outdoor spaces. Enjoy rain or shine—conveniently suitable for wet locations. Compact light fits easily in small spaces. Profile is super thin—only 1.25 in. in height. High-quality alloys are powder coated to provide phenomenal durability and an attractive gleam. Hard surface provides top quality protection against scratches. Outer lacquer finish provides an attractive sheen and additional layer of protection. Integrated LED comes with a 5-year limited warranty.

3" or 4" Junction Box Installation

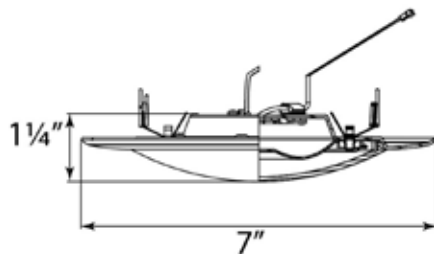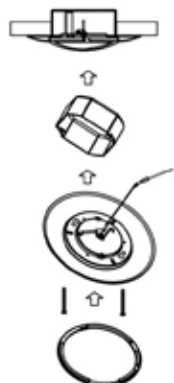

V8622

1-LIGHT INTEGRATED LED INDOOR/OUTDOOR CONVERTIBLE SURFACE MOUNT OR WALL MOUNT, WITH SEALED FROSTED POLYCARBONATE LENS COVER AND ROUND FLANGED TRIM

SPECIFICATIONS

Type of Lighting	Indoor or Outdoor Ceiling Lighting or Wall Lighting
Product Type	Ceiling Fixture or Wall Mount
Product Subtype	New Construction Surface Mount or Retrofit LED
Height (in.)	1.25
Width (in.)	7
Length or Extension/Projection (in.)	7
Available Finishes	Black (V8622-5) White (V8622-6) Brushed Nickel (V8622-33) Antique Bronze (V8622-79)
Main Material	All-Aluminum Construction (Housing and Trim)
Other Material	Sealed White Frosted Polycarbonate Lens Cover and Round Flanged Trim
Light Direction	Down (Ceiling-Mounted) or Outward (Wall-Mounted)
Mounting Deck Shape	Circle
Installation Location	Wet
Light #	1
Watts per Light (W)	15
Total Wattage (W)	15
Light Source Included?	Yes (Integrated LED)
Light Bulb(s) Included?	N/A (Integrated LED Light Source Included)
CRI	>95
Color Temperature (K)	3000
Lumens per Light	950
Total Lumens	950
Power Factor (Pf)	>.95
Life Rated (Hours)	50,000
Dimmable?	Yes (10% of Output)
Base	N/A (Integrated LED)
Input Voltage (Volts)	120V at 60/50 Hz
Operating Temperature (C°)	<80°C
Compliances	NATIONAL ELECTRICAL CODE 410.16 (C1-5): Code C5 for closet luminaire when installed per code.
Safety Ratings	cULus Listed
Assembly	No Assembly Required
Integrated LED Warranty	5-Year Limited Warranty